

C37 CANDLE FILAMENT

SUPER EFFICIENT
90
LUMEN
per **WATT**

Areas of application

- Indoor use
- General illumination
- Chandeliers
- Outdoor applications only in suitable luminaires



Product benefits and features

- Long lifetime of up to 30,000 hours
- Low energy consumption
- Easy replacement
- Instant 100% light, no warm-up time

No UV and thermal radiation
Free from harmful elements

Hg
Mercury **0%**

ACD™
DRIVER
for longer life & superior heat resistance.

-20°C to 50°C operating temperature



Non-dimmable

2**
YEAR
GUARANTEE

1/0
≥15000

Instant light

Technical data

Electrical data

Wattage	2W	4W
Nominal wattage	2W	4W
Nominal voltage	220-250V	220-250V
Operating frequency	50-60Hz	50-60Hz
equiv. wattage of lamp	25W	40W
Nominal luminous flux	250lms	470lms
Rated luminous flux	250lms	470lms
Beam angle	330°	330°

Colour and temperature


Light colour	Warm White
Colour temperature	2700K

Light technical data

Warm-up time (60 %)	≤ 1.00 s
Starting time	< 0.5 s

Dimensions & weight

Overall length	100 mm
Diameter	37 mm

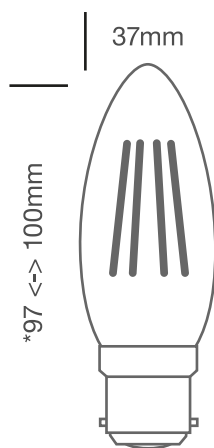





*size varies depending on
cap base & clear or pearl type

Lifespan

Nominal lamp life time	30,000 hours
Rated lamp life time	30,000 hours
Number of switching cycles	15,000
Lumen main.fact.at end of nom.life time	0.70

Additional product data

Base	 SES (E14) 14mm	 ES (E27) 27mm	 SBC (B15) 15mm	 BC (B22) 22mm
Mercury content	0.0 mg			
Mercury-free	Yes			
Design / version	Clear			
Appropriate disposal acc. to WEEE	Yes			
Product remark	All technical parameters apply to the entire lamp. Due to the complex production process for light-emitting diodes, the typical values shown for the technical LED parameters are purely statistical values that do not necessarily match the actual technical parameters of each individual product, which can vary from the typical value			

Capabilities

Dimmable	No
----------	----

Certificates & standards

Energy efficiency class	A+
Energy consumption	2 kWh/1000h 4 kWh/1000h

Logistical Data

Product code	Product description	Cover	Colour	Power	Units	Inner	Master	Pallet
SLCCSES2F	C37 2W-E14	CLEAR	WARM WHITE	2W=25W	1 Pack	12	10x12	30
SLCCES2F	C37 2W-E27	CLEAR	WARM WHITE	2W=25W	1 Pack	12	10x12	30
SLCCSBC2F	C37 2W-B15	CLEAR	WARM WHITE	2W=25W	1 Pack	12	10x12	30
SLCCBC2F	C37 2W-B22	CLEAR	WARM WHITE	2W=25W	1 Pack	12	10x12	30
SLCCSES4F	C37 4W-E14	CLEAR	WARM WHITE	4W=40W	1 Pack	12	10x12	30
SLCCES4F	C37 4W-E27	CLEAR	WARM WHITE	4W=40W	1 Pack	12	10x12	30
SLCCSBC4F	C37 4W-B15	CLEAR	WARM WHITE	4W=40W	1 Pack	12	10x12	30
SLCCBC4F	C37 4W-B22	CLEAR	WARM WHITE	4W=40W	1 Pack	12	10x12	30

References / Links

For further products and actual information concerning LED lamps see: <http://www.supacell.eu.com/led/>
 For Supacell LED Catalogue: http://www.multibrands.eu.com/Supacell_LED_Catalogue/

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.